



INSTRUCTIONS

Whistle Gourd Special Features

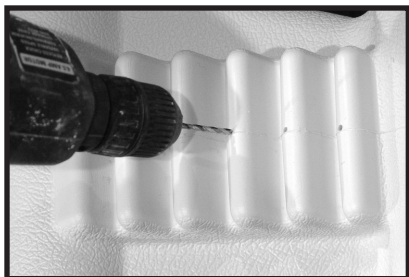

ALLOWING DRAINAGE.


To protect the nest from water, use a small drill bit to drill a hole in each of the cascading "teeth" as shown. This will allow water to keep from getting to the nest.

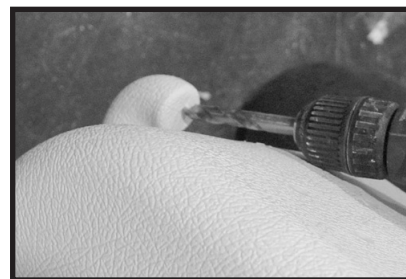


PERMITTING MORE AIR FLOW.

To permit more airflow inside the Whistle Gourd, use a 1/4 Drill Bit and drill out a hole at the bottom of the rear ventilation chimney on the Whistle Gourd. This will allow the hot air at the top of the Whistle Gourd to escape, while the nest remains cooler.


Attaching the Whistle Gourd To The Hanging Block

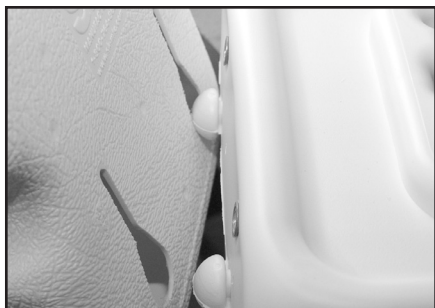

1. The back of the Whistle Gourd has a pre-cut area to attach to the S&K Hanging Block. Push the block knobs through the larger Whistle Gourd openings, then push the Whistle Gourd down so that it locks in place.

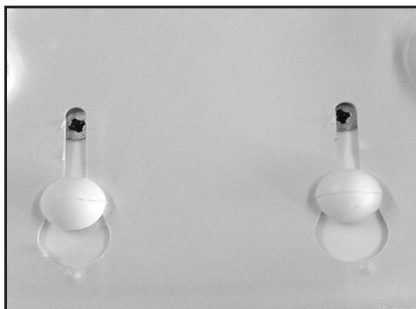

2. THIS CUTOUT shows the inside back of the Gourd as it is to be attached to the S&K Hanging Block. The attached area is on the INSIDE of the Whistle Gourd.

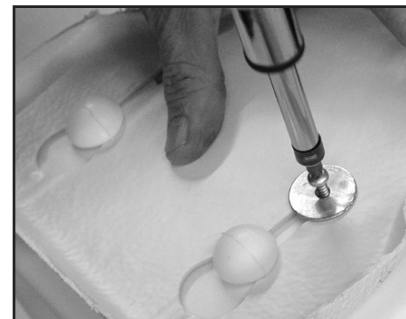

3. Using a sheet metal screw and washer, attach the Whistle Gourd securely to the Hanging Block. (This is a cut out of a gourd.)