



# MUST READ IN ENTIRETY BEFORE ASSEMBLING Instructions For Installing Your New Quad-Tel Pole

## WARNING! ← FOR YOUR SAFETY! →


Examine your location for the Quad-Tel Pole. DO NOT ERECT POLE NEAR ELECTRICAL WIRES IN THE AIR OR UNDER THE GROUND! Pole is not warranted against high winds, weather and acts of God.



Your Quad-Tel Pole was shipped with the four pole Sections together. The outer section — the widest - is pole section "D" with "A" being the smallest section. Separate the four pole sections to begin step 1.


### Step 1

Insert 4 wadded-up plastic grocery store-type bags (not supplied) in the D Pole Section. They act as shock absorbers.



### Step 2:

After a **safe location** has been determined for raising your Tri-Tel Pole, dig a hole 21 inches deep and 12 inches in diameter. Create a 4" platform of concrete at the base of the hole. Let it set for 1 hour. If using the S&K SLEEVE, place the sleeve in the center of hole. (The sleeve allows for removal of the pole when desired.) Install Pole Section D (the largest section) into the hole OR sleeve. Fill around the pole or sleeve with concrete (one 80lb bag of Concrete mix) - Plumb the "D" section of pole or sleeve, then follow the instructions on the bag of concrete mix. Let concrete set for 24 hours prior to proceeding to the next step.

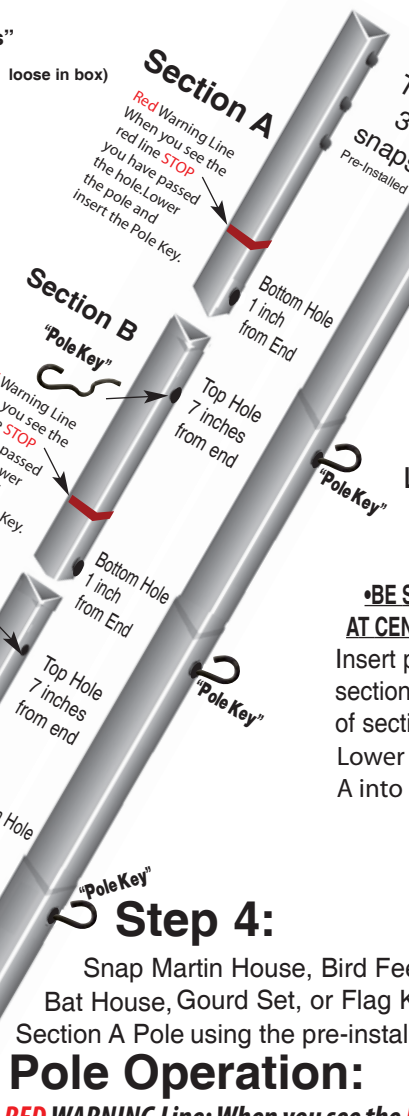

- Parts List:**
- 4 Pole Sections
  - 3 "A" Snap Buttons (3 pre-installed)
  - 3 "Pole Keys" (loose in box)
- Look for loose keys on side of poles.

### Step 3:

**BE SURE POLES ARE IN ORDER SHOWN AT CENTER OF PAGE!**  
Insert pole section C fully into pole section D. Lower end of section B into section C. Lower end of section A into pole section B.


### Step 4:

Snap Martin House, Bird Feeder, Bat House, Gourd Set, or Flag Kit on top of Section A Pole using the pre-installed pole snaps.

### Pole Operation:

**RED WARNING Line: When you see the RED line STOP! You have passed the hole. Lower the pole and insert the Pole Key.**

Raise pole section A to align the hole with pole section B then insert the Pole Key. Raise pole section B to align the hole with pole section C then insert the pole key. Raise pole section C to align the hole with pole section D then insert the pole key.

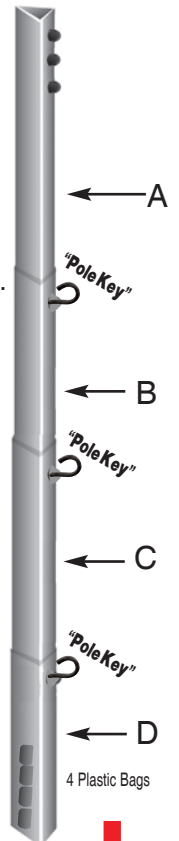

**S&K Manufacturing, Inc.**  
1001 Liberty Industrial Drive  
O'Fallon, Mo 63366  
www.skmfg.com  
**1-800-764-8688**

### LIMITED WARRANTY

**MAKE YOUR POLE TALLER - ADDITIONAL SECTION OF POLE CAN BE PURCHASED BY CALLING 1-800-764-8688**



**When lowered the pole sections should not go all the way inside the lower pole section(s).**

### Safety Tips:

Common sense must be used. When high winds are expected lower your S&K Pole. This will not only protect your pole, but will also protect you, your bird house, flags, gourds or other items being used on your Quad-Tel Pole.

**DO NOT LET GO OF POLE WHEN RAISING OR LOWERING UNTIL POLE KEYS ARE INSTALLED CORRECTLY!**

During cold weather, If you live where the ground freezes, DO NOT Lower Any Section below ground level during the winter months. This will protect your pole against freeze damage.

To lower pole: Gently lift the section of pole, then remove the Pole Key. Lower the pole section slowly - DO NOT ALLOW THE POLE TO DROP. Continue the process with the remaining pole sections.