

Instructions For Installing Your New Tri-Tel 12 Foot Pole

WARNING! ← FOR YOUR SAFETY! →

Examine your location for the Tri-Tel Pole. **DO NOT ERECT POLE NEAR ELECTRICAL WIRES IN THE AIR OR UNDER THE GROUND!** Pole is not warranted against high winds, weather and acts of God.

Three Pole Sections

4 "A" Snaps
(3 are pre-installed)
(1 loose in box)

1 "B" Snap

PRE-INSTALLED SMALL PLASTIC SNAPS

Parts List:

- 3 Pole Sections
- 4 "A" Snap Buttons (3 installed / 1 loose in box)
- 1 "B" Snap Button


Look for loose snaps on side of poles.

Your Tri-Tel Pole was shipped with the three pole segments together. The outer segment — the widest - is pole segment C with A being the smallest segment. Separate the three pole segments by pressing the snap buttons at each end while pushing the inner pole segments out.

Step 1: Very Important

Insert Snap Button - V-Shape enters first. Push small snap in place in section A and B until it pops through the hole.

Insert 2 wadded-up plastic grocery store-type bags (not supplied) in the C Pole Section. Above the snap at the bottom of "B" insert 2 more wadded-up plastic grocery store-type bags (not supplied). They act as shock absorbers. Then insert snap.



Step 2:

After a **safe location** has been determined for raising your Tri-Tel Pole, dig a hole 21 inches deep and 12 inches in diameter. Create a 4" platform of concrete at the base of the hole. Let it set for 1 hour. If using the S&K SLEEVE, place the sleeve in the center of hole. (The sleeve allows for removal of the pole when desired.) Install Pole Section C (the largest section) into the hole OR sleeve. Fill around the pole or sleeve with concrete (one 80lb bag of Quik-Krete works best) - ensuring the pole section remains vertical and straight up and down. Add gal of water. Let concrete set for 24 hours prior to proceeding to the next step.

Sleeve (optional) allows you to move the pole out of a hole so it can be used for other purposes, and in other locations i.e. Flag Pole, Bird Feeder.

Part: GS3 Black Sleeve

Plastic Sleeve by **SK** Manufacturing

Step 3:

•BE SURE POLES ARE IN ORDER SHOWN AT CENTER OF PAGE!


Insert pole section B fully into pole section C. Lower end of section A into section B.

Raise pole section A until the snap button snaps into place. Raise section B until it snaps into a locked position.

Step 4:

Snap Martin House, Bird Feeder, Bat House, Gourd Set, or Flag Kit on top of Section A and enjoy your new Tri-Tel Pole.

S&K Manufacturing, Inc.
1001 Liberty Industrial Drive
O'Fallon, Mo 63366
www.skmfg.com
1-800-764-8688

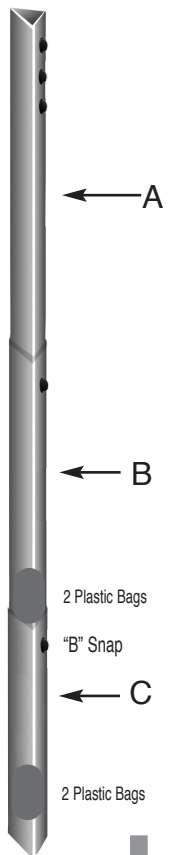

LIMITED WARRANTY

MAKE YOUR POLE TALLER - ADDITIONAL SECTION OF POLE CAN BE PURCHASED BY CALLING 1-800-764-8688



When lowered the pole sections should not go all the way inside the lower pole section(s).

Safety Tips:

Common sense must be used. When high winds are expected, lower your S&K Pole. This will not only protect your pole, but will also protect your bird house, flags, gourds or other items being used on it.

During cold weather, If you live where the ground freezes, DO NOT

Lower Any Section below ground level during the winter months. This will protect your pole against freeze damage.

To lower pole: Gently lift the section of pole, then push in the snap button. Lower the pole section slowly - DO NOT ALLOW THE POLE TO DROP. Continue the process with the remaining pole sections.